

# CATALYST FOR NITROGEN OXIDES (NO<sub>x</sub>) REDUCTION IN DIESEL ENGINE EXHAUSTS

 TECNOLOGÍA PATENTADA


## DATOS DE CONTACTO:

Research Results Transfer Office-OTRI  
University of Alicante  
Tel.: +34 96 590 99 59  
Email: [areaempresas@ua.es](mailto:areaempresas@ua.es)  
<http://innoua.ua.es>

## RESUMEN

The research team “Carbon materials and environment” at the Department of Inorganic Chemistry at University of Alicante has synthesised a noble metal-free catalyst for nitrogen oxides (NO<sub>x</sub>) storage and reduction (NSR catalyst). The catalyst developed consists of a copper-doped mixed oxide with perovskite structure.

Its major application is the removal of NO<sub>x</sub> gas in oxygen-enriched streams such as the exhaust gases emitted by diesel engines.

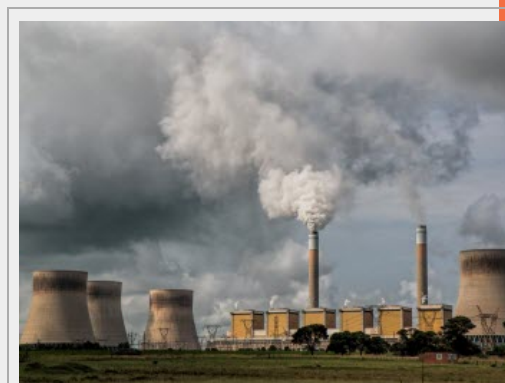

## INTRODUCCIÓN

It is well-known that diesel and gasoline engines operate under different combustion conditions, and for this reason, their exhaust compositions are also different. Diesel engines emit oxygen-rich gases and the reduction of nitrogen oxides (NO<sub>x</sub>) in these conditions is difficult. In these oxygen-rich exhausts the three-way catalysts (TWC), which are successfully used in gasoline engines, cannot operate.

There exist different processes to control NO<sub>x</sub> emissions in Diesel exhausts, among which the so-called NO<sub>x</sub> Storage and Reduction Catalysts (NSR catalyst) must be highlighted. The NSR technology works under cyclic conditions of fuel lean and fuel rich environments. Under lean conditions, when oxygen is in excess, NO<sub>x</sub> is adsorbed on the catalyst, and under rich conditions, when a reductant is added, NO<sub>x</sub> reduction takes places.

A typical NSR catalyst combines a NO<sub>x</sub> adsorption material, like an alkali or alkaline earth metal oxide, with noble metals, which catalyse the oxidation of NO under lean conditions and the reduction of the stored NO<sub>x</sub> under rich conditions. One of the most commonly and effective formulations used as NSR catalyst is Pt-BaO/Al<sub>2</sub>O<sub>3</sub>. However, this formulation shows some drawbacks such as the low thermal stability at high temperatures and the formation of barium carbonate in the presence of CO<sub>2</sub> (temperature > 450°C). In addition, barium oxide tends to react with the support, decreasing the NO<sub>x</sub> storage capacity, and the use of noble metals (such as platinum) makes the application of this NSRC technology expensive.

## DESCRIPCIÓN TÉCNICA

In order to overcome the stated disadvantages, the Spanish University has developed a new material for optimising the catalyst performance. The invention consists of a mixed oxide with perovskite structure. Its general formula is ABO<sub>3</sub>, where A is an alkaline earth metal (Ba, Sr, Ca, Mg) and B is a tetravalent transition metal (titanium), partly replaced with Cu.

For the preparation of these mixed oxides, the titanium precursor was dissolved in isopropyl alcohol and dropped into a water solution of citric acid. After that, hydrogen peroxide and citric acid were added until the precipitate was dissolved, following by the addition of A (Ba, Sr, Ca or Mg) and copper nitrates. The solution was evaporated to produce syrup which was dried and

calcined.

The amount of NO<sub>x</sub> stored on these mixed oxides is much higher, when compared on surface area basis, than those of noble metal-containing reference catalysts.

#### VENTAJAS Y ASPECTOS INNOVADORES DE LA TECNOLOGÍA

The advantages of this new catalyst formulation are:

- Capability for operating under typical NSR conditions, where the treated gas composition periodically alternates between oxidising and reducing conditions.
- Higher NO<sub>x</sub> storage capacity per surface area unit (and comparable capacity in mass basis) than conventional noble metal-containing systems.
- Lower cost of the materials in comparison to noble metal-containing formulations.

#### INNOVATIVE ASPECTS

The main innovative aspect of this approach is that the synthesised material is able to remove NO<sub>x</sub> in a similar way than noble metal-containing catalysts (the most effective nowadays) but lowering the price of the materials.

#### ESTADO ACTUAL DE LA TECNOLOGÍA

Different tests analysing the NO<sub>x</sub> absorption characteristics employing several ABO<sub>3</sub> formulations have been carried out at laboratory scale. The obtained results showed the suitability of this compound for its use as NSR catalyst.

#### APLICACIONES DE LA OFERTA

This technology is useful for the storage and reduction of nitrogen oxides (NO<sub>x</sub>) in oxygen-rich gas streams. Specifically, it can be employed in the purification process of exhaust gases in diesel engines.

#### COLABORACIÓN BUSCADA

The research group is looking for automotive industries interested in acquiring the technology for its commercial exploitation. The researchers are also interested in testing a prototype in real conditions, so they are also opened to collaborations for carrying out the scaling-up process.

#### DERECHOS DE PROPIEDAD INTELECTUAL

This technology is protected by patent:

- Application number: 201001234
- Application date: 27/09/2010

#### SECTORES DE APLICACIÓN (4)

Pollution and Environmental Impact  
Engineering, Robotics and Automation  
Chemical Technology  
Transport and Automotive